




客户图

NOTES:

1. FINISH:
 - 1.1 HOUSING: HIGH TEMPERATURE PLASTIC NATURAL, UL94V-0.
 - 1.2 CONTACT: PHOSPHOR COPPER.GOLD (SEE P/N) PLATED, 50u" MIN. NICKEL UNDERPLATED OVER ALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 0.5 A.
 - 2.2 VOLTAGE RATING: 50 V AC.
 - 2.3 CONTACT RESISTANCE: 40mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 500MΩ MIN.
 - 2.5 WITHSTANDING VOLTAGE: 200V AC/1MINUTE.
 - 2.6 OPERATION TEMPERATURE:-25°C TO +105°C.
3. ORDER INFORMATION:


66A6-F XXX XX XXX R 01

Pin数码	端子电镀:	塑胶高度:	包装方式:
004=04PIN	G0=Gold Flash	013=1.35mm("H1")	R=REEL
~	G1=1u" Gold	018=1.85mm("H1")	
055=55PIN	G2=3u" Gold	023=2.35mm("H1")	
	G3=5u" Gold		

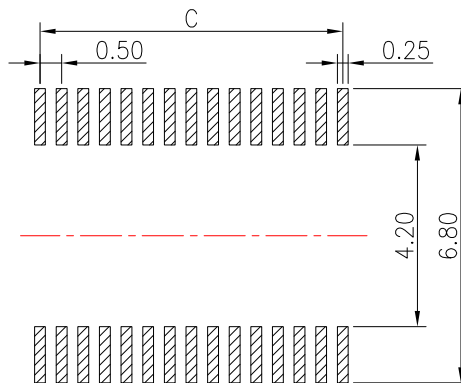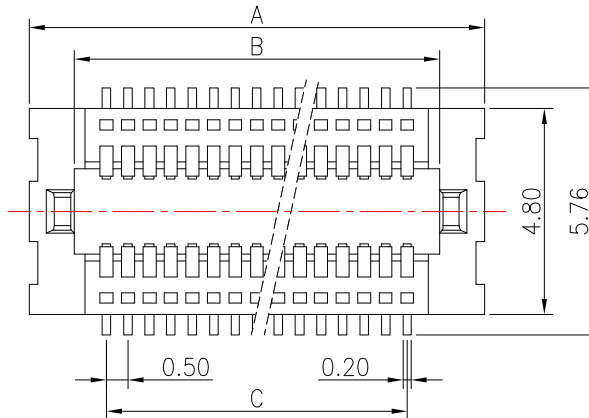


RECOMMENDED PCB PATTERN DIM.


TOLERANCE : ±0.05




STANDING HEIGHT: H1(1.35)



STANDING HEIGHT: H1(1.85)



STANDING HEIGHT: H1(2.35)



MATING HEIGHT

MATING HEIGHT	H1	H2
1.50mm	1.35	1.50
2.00mm	1.85	2.00
2.50mm	2.35	2.50

No. OF PIN	A	B	C	No. OF PIN	A	B	C
004	5.10	3.00	1.50	030	18.10	16.00	14.50
005	5.60	3.50	2.00	031	18.60	16.50	15.00
006	6.10	4.00	2.50	032	19.10	17.00	15.50
007	6.60	4.50	3.00	033	19.60	17.50	16.00
008	7.10	5.00	3.50	034	20.10	18.00	16.50
009	7.60	5.50	4.00	035	20.60	18.50	17.00
010	8.10	6.00	4.50	036	21.10	19.00	17.50
011	8.60	6.50	5.00	037	21.60	19.50	18.00
012	9.10	7.00	5.50	038	22.1	20.00	18.50
013	9.60	7.50	6.00	039	22.60	20.50	19.00
014	10.10	8.00	6.50	040	23.10	21.00	19.50
015	10.60	8.50	7.00	041	23.60	21.50	20.00
016	11.10	9.00	7.50	042	24.10	22.00	20.50
017	11.60	9.50	8.00	043	24.60	22.50	21.00
018	12.10	10.00	8.50	044	25.10	23.00	21.50
019	12.60	10.50	9.00	045	25.60	23.50	22.00
020	13.10	11.00	9.50	046	26.10	24.00	22.50
021	13.60	11.50	10.00	047	26.60	24.50	23.00
022	14.10	12.00	10.50	048	27.10	25.00	23.50
023	14.60	12.50	11.00	049	27.60	25.50	24.00
024	15.10	13.00	11.50	050	28.10	26.00	24.50
025	15.60	13.50	12.00	051	28.60	26.50	25.00
026	16.10	14.00	12.50	052	29.10	27.00	25.50
027	16.60	14.50	13.00	053	29.60	27.50	26.00
028	17.10	15.00	13.50	054	30.10	28.00	26.50
029	17.60	15.50	14.00	055	30.60	28.50	27.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WLY	SCALE	UNIT	mm	SCALE	1:1	PROJ.	SIZE	A4	PART NO.	66A6-FXXXXXXXR01	TITLE:	0.50mm BTB 公头 立式180° SMT 无柱 无接地片
AO		NEW			X.X ±0.30	DESIGN	Jensen	2019.08.24											
					X.XX ±0.20	CHECK	Jack	2019.08.24											
					X.XXX ±0.10	APPROVE	Andy	2019.08.22											
					Angle ±3°														
					DIM. TOL														

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

2019.08.24
2019.08.24
2019.08.24
2019.08.22
SP-396

客户图




NOTES:

1. FINISH:
 - 1.1 HOUSING: HIGH TEMPERATURE PLASTIC NATURAL, UL94V-0.
 - 1.2 CONTACT: PHOSPHOR COPPER.GOLD (SEE P/N) PLATED, 50u" MIN. NICKEL UNDERPLATED OVER ALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING: 0.5 A.
 - 2.2 VOLTAGE RATING: 50 V AC.
 - 2.3 CONTACT RESISTANCE: 40mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 500MΩ MIN.
 - 2.5 WITHSTANDING VOLTAGE: 200V AC/1MINUTE.
 - 2.6 OPERATION TEMPERATURE: -25°C TO +105°C.


3.ORDER INFORMATION:

66A6-M XXX XX 012 R 01

Pin数码	端子电镀:	塑胶高度:	包装方式:
004=04PIN	G0=Gold Flash	012=1.28mm	R=REEL
~	G1=1u" Gold		
055=55PIN	G2=3u" Gold		
	G3=5u" Gold		

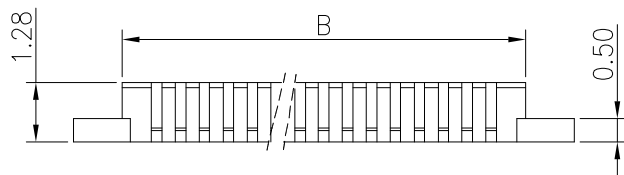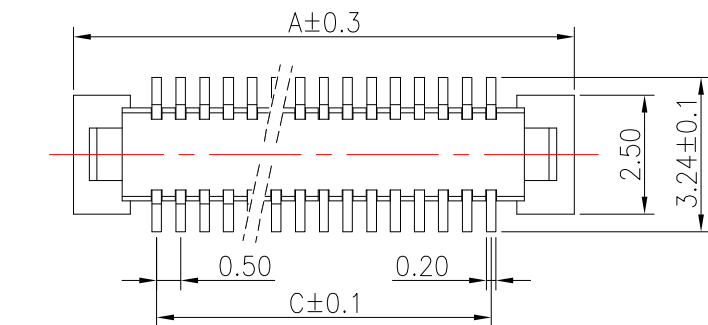


	A	B	C		A	B	C
004	5.00	2.90	1.50	030	18.00	15.90	14.50
005	5.50	3.40	2.00	031	18.50	16.40	15.00
006	6.00	3.90	2.50	032	19.00	16.90	15.50
007	6.50	4.40	3.00	033	19.50	17.40	16.00
008	7.00	4.90	3.50	034	20.00	17.90	16.50
009	7.50	5.40	4.00	035	20.50	18.40	17.00
010	8.00	5.90	4.50	036	21.00	18.90	17.50
011	8.50	6.40	5.00	037	21.50	19.40	18.00
012	9.00	6.90	5.50	038	22.00	19.90	18.50
013	9.50	7.40	6.00	039	22.50	20.40	19.00
014	10.00	7.90	6.50	040	23.00	20.90	19.50
015	10.50	8.40	7.00	041	23.50	21.40	20.00
016	11.00	8.90	7.50	042	24.00	21.90	20.50
017	11.50	9.40	8.00	043	24.50	22.40	21.00
018	12.00	9.90	8.50	044	25.00	22.90	21.50
019	12.50	10.40	9.00	045	25.50	23.40	22.00
020	13.00	10.90	9.50	046	26.00	23.90	22.50
021	13.50	11.40	10.00	047	26.50	24.40	23.00
022	14.00	11.90	10.50	048	27.00	24.90	23.50
023	14.50	12.40	11.00	049	27.50	25.40	24.00
024	15.00	12.90	11.50	050	28.00	25.90	24.50
025	15.50	13.40	12.00	051	28.50	26.40	25.00
026	16.00	13.90	12.50	052	29.00	26.90	25.50
027	16.50	14.40	13.00	053	29.50	27.40	26.00
028	17.00	14.90	13.50	054	30.00	27.90	26.50
029	17.50	15.40	14.00	055	30.50	28.40	27.00

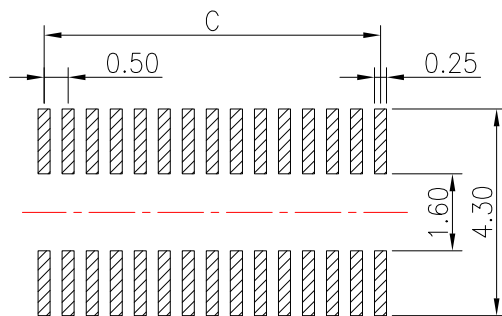

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05



MATING HEIGHT

MATING HEIGHT	H1	H2
1.50mm	1.35	1.50
2.00mm	1.85	2.00
2.50mm	2.35	2.50

					OPERATION	DRAW	WLY	2019.08.24	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.						
					X.X	±0.30	DESIGN	Jensen					2019.08.24		
					X.XX	±0.20	CHECK	Jack					2019.08.24		
					X.XXX	±0.10	APPROVE	Andy					2019.08.22		
AO					Angle	±3°				SIZE	A4	PART NO.	66A6-MXXXXX012R01		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	UNIT	mm	SCALE	1:1	SHEET	1/1	TITLE:	0.50mm BTB 母座 立式180° SMT 无柱 无接地片	
							DIM.	TOL			PROJ.	⊙	DRAW NO.	SP-397	