

客户图








NOTES:

1. FINISH:
 - 1.1 HOUSING: LCP,UL94V-0.
 - 1.2 CONTACT: BRASS,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING:3.0A;
 - 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 - 2.3 CONTACT RESISTANCE: 50mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.5 OPERATION TEMPERATURE:-40°C TO +125°C.

3.ORDER INFORMATION:

66H8-F XXX XX 118 C 01

Pin 数码	端子电镀:	塑胶高度:
020:2*10PIN	S0=Gold Flash/Tin(半金锡)	118=11.80mm
030:2x15PIN	S1=1u" Gold/Tin	
040:2x20PIN	S2=3u" Gold/Tin	
050:2x25PIN	S3=5u" Gold/Tin	
060:2x30PIN	S4=10u" Gold/Tin	
.....	S5=15u" Gold/Tin	
100:2*50PIN		
(10-100PIN任意选择)		

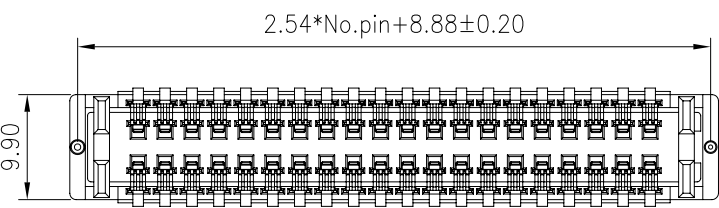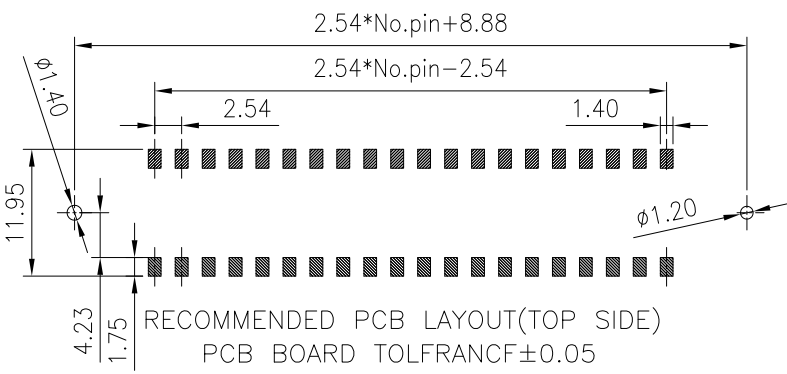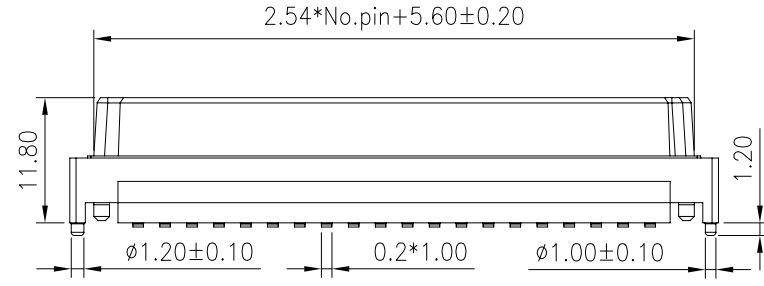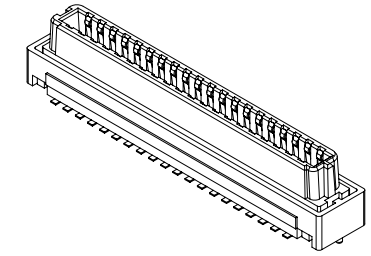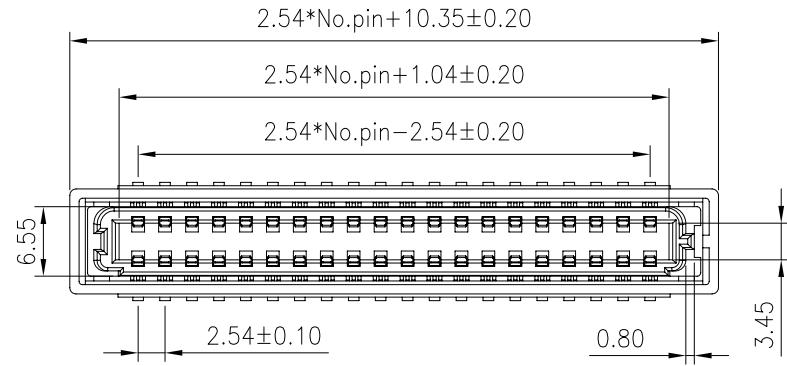

高度也可以按照客户定制 14.50-40.00mm

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	φ	DRAW NO.	SP-956
AO		NEW			OPERATION	DRAW	WLY	2022.06.08	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.					
					X.X ±0.40	DESIGN	Jensen	2022.06.08						
					X.XX ±0.25	CHECK	Jack	2022.06.08						
					X.XXX ±0.15	APPROVE	Andy	2022.06.08						
					Angle ±3°									

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

SIZE	A4	PART NO.	66H8-FXXXXX118C01
SHEET	1/1	TITLE:	BTB PITCH 2.54mm 母座直立式SMT TYPE 塑高11.80mm
PROJ.	φ	DRAW NO.	SP-956

客户图








NOTES:

1. FINISH:
 - 1.1 HOUSING: LCP,UL94V-0.
 - 1.2 CONTACT: BRASS,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA, 50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 CURRENT RATING:3.0A;
 - 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 - 2.3 CONTACT RESISTANCE: 50mΩ MAX.
 - 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.5 OPERATION TEMPERATURE:-40°C TO +125°C.

3.ORDER INFORMATION:

66H8-M XXX XX 075 C 01

Pin数码	端子电镀:	塑胶高度:
020:2*10PIN	S0=Gold Flash/Tin(半金锡)	075=7.50mm
030:2x15PIN	S1=1u" Gold/Tin	
040:2x20PIN	S2=3u" Gold/Tin	
050:2x25PIN	S3=5u" Gold/Tin	
060:2x30PIN	S4=10u" Gold/Tin	
.....	S5=15u" Gold/Tin	
100:2*50PIN		
(10-100PIN任意选择)		

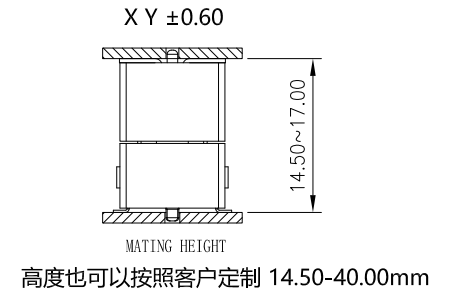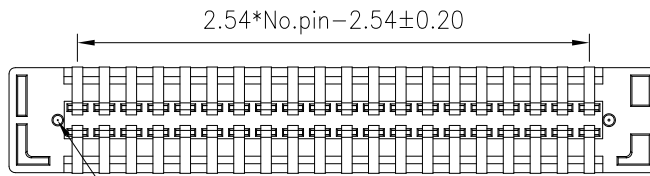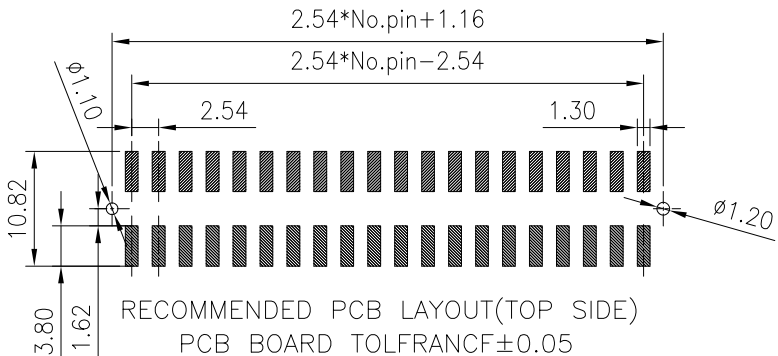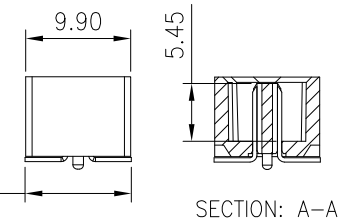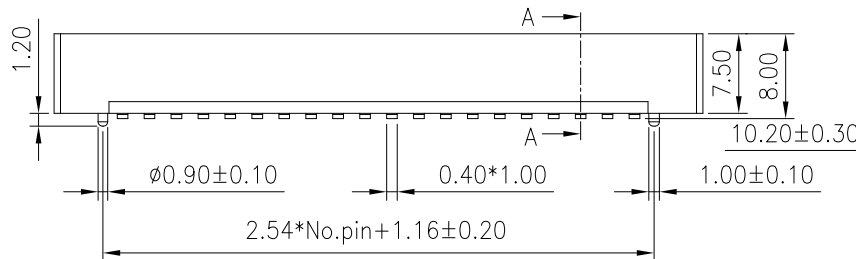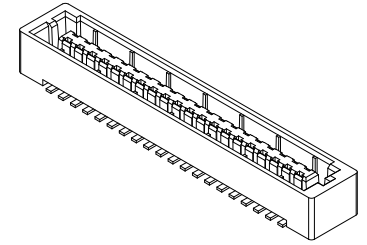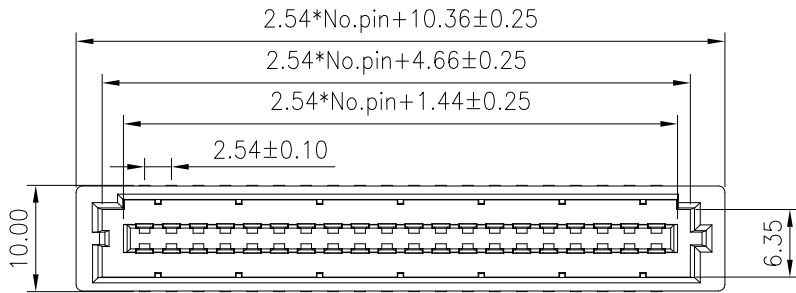

					OPERATION	DRAW	WLY	2022.06.08	SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
					X.X ±0.40	DESIGN	Jensen	2022.06.08					
					X.XX ±0.25	CHECK	Jack	2022.06.08					
					X.XXX ±0.15	APPROVE	Andy	2022.06.08					
AO		NEW			Angle ±3°				SIZE	A4	PART NO.	66H8-MXXXXX075C01	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM. TOL	UNIT	mm	SCALE	1:1	SHEET	1/1	TITLE:	BTB PITCH 2.54mm 公座直立式SMT TYPE 塑高7.50mm
									PROJ.	☯	DRAW NO.	SP-955	