

客户图

NOTES:

1. FINISH:
 - 1.1 HOUSING: PBT BLACK,UL94V-0.
 - 1.2 CONTACT: C5191,GOLD (SEE P/N) PLATED
IN CONTACT AERA, 80u" MIN MATTE TIN PLATED IN
SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 VOLTAGE RATING:300V;
 - 2.2 CURRENT RATING:3A;
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
 - 2.4 CONTACT RESISTANCE: 20mΩ MAX.
 - 2.5 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.6 OPERATION TEMPERATURE:-40°C TO +105°C.
- 3.ORDER INFORMATION:







61H2- S XXX XX 155 C 01

180° 直插


Pin数码 端子电镀: 塑胶高度: 包装方式:
SEE TABLE S0=Gold Flash/Tin 155=15.5mm C=TRAY
006=2*3PIN (半金锡)
~
100=2*50PIN S1=1u" Gold/Tin
 S2=3u" Gold/Tin
 S3=5u" Gold/Tin
 S4=10u" Gold/Tin
 S5=15u" Gold/Tin
 S6=30u" Gold/Tin

TABLE1:

No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.60	133.80

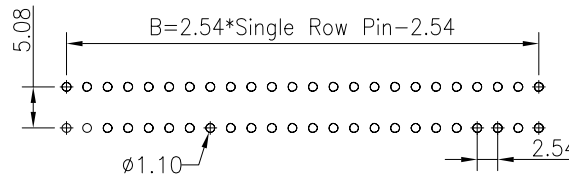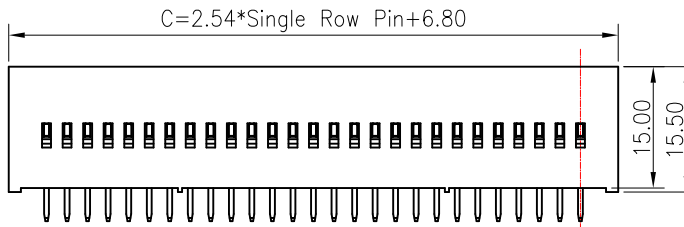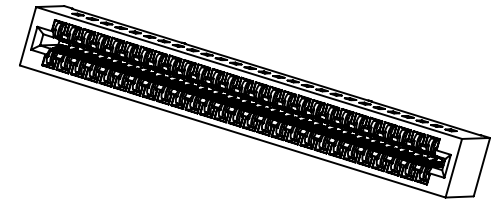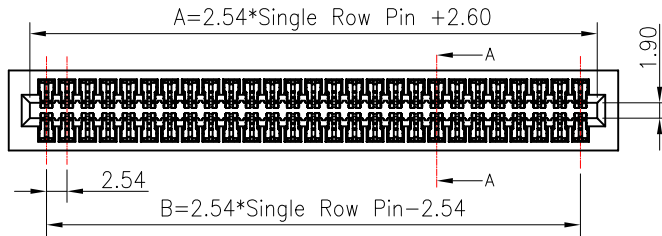

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLFRANCF+0.05)



SECTION:A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		WLY		2021.04.08		SOLEPIN 东莞市硕品电子有限公司 Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.	
					DIM.	TOL	UNIT	mm	SCALE	1:1				
A1	2021.04.08	更正铜材型号	WLY		X.X	±0.40	DESIGN	Jensen						
AO		NEW			X.XX	±0.25	CHECK	Jack						
					X.XXX	±0.15	APPROVE	Andy						
					Angle	±3°								

SOLEPIN 东莞市硕品电子有限公司
Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.

SIZE A4 PART NO. 61H2-SXXXXX155C02
SHEET 1/2 TITLE: 2.54mm 金手指 DIP 180° PIN针外露3.60mm
PROJ. DRAW NO. SP-379

客户图

NOTES:

1. FINISH:
 - 1.1 HOUSING: PBT BLACK,UL94V-0.
 - 1.2 CONTACT: C5191,GOLD (SEE P/N) PLATED IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.
2. ELECTRICAL:
 - 2.1 VOLTAGE RATING:300V;
 - 2.2 CURRENT RATING:3A;
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
 - 2.4 CONTACT RESISTANCE: 20mΩ MAX.
 - 2.5 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.6 OPERATION TEMPERATURE:-40°C TO +105°C.
- 3.ORDER INFORMATION:







61H2- R1 XXX XX 099 C 01

2.54x2.54mm 90° 折弯

Pin 数码 SEE TABLE 006=2*3PIN ~ 100=2*50PIN	端子电镀: G0=Gold Flash G1=1u" Gold G2=3u" Gold G3=5u" Gold S0=Gold Flash/Tin S1=1u" Gold/Tin S2=3u" Gold/Tin S3=5u" Gold/Tin S4=10u" Gold/Tin S5=15u" Gold/Tin S6=30u" Gold/Tin	塑胶高度: 099=9.90mm C=TRAY
---	---	-------------------------------

TABLE 1:

No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.60	133.80

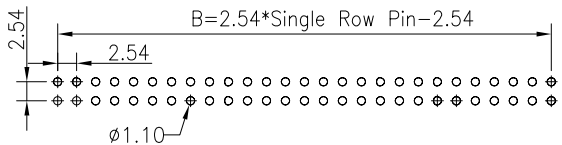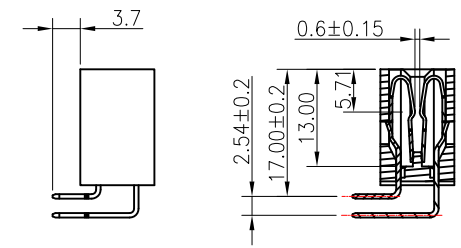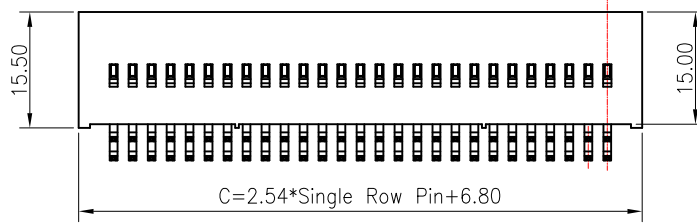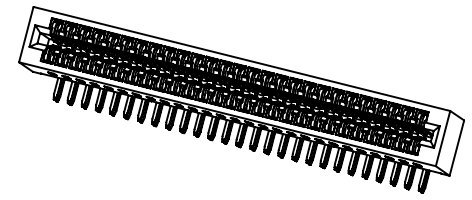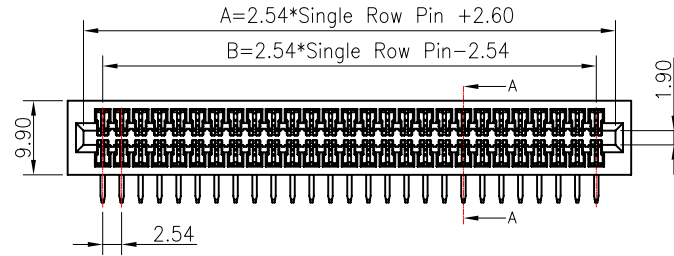

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLFRANCF+0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		WLY		SOLEPIN 东莞市硕品电子有限公司			
					DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	SIZE	A4	PART NO.
A1	2021.04.08	更正铜材型号	WLY		X.X	±0.40	DESIGN	Jensen	2021.04.08	Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
AO		NEW			X.XX	±0.25	CHECK	Jack	2021.04.08	SHEET	1/2	TITLE:	2.54x2.54mm 金手指 DIP 90°	
					X.XXX	±0.15	APPROVE	Andy	2021.04.08	PROJ.	☞	DRAW NO.	SP-378	

客户图

- NOTES:
- FINISH:
 - HOUSING: PBT BLACK,UL94V-0.
 - CONTACT: C5191,GOLD (SEE P/N) PLATED
IN CONTACT AREA, 80u" MIN MATTE TIN PLATED IN
SOLDER AREA,50u" MIN. NICKEL UNDERPLATED OVERALL.
 - ELECTRICAL:
 - VOLTAGE RATING:300V;
 - CURRENT RATING:3A;
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MINUTE.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATION TEMPERATURE:-40°C TO +105°C.
 - ORDER INFORMATION:





61H2- R2 XXX XX 099 C 04

2.54x5.08mm 90° 折弯




Pin 数码 SEE TABLE	端子电镀:	塑胶高度:	包装方式:
006=2*3PIN	G0=Gold Flash	099=9.90mm	C=TRAY
~	G1=1u" Gold		
100=2*50PIN	G2=3u" Gold		
	G3=5u" Gold		
	S0=Gold Flash/Tin		
	S1=1u" Gold/Tin		
	S2=3u" Gold/Tin		
	S3=5u" Gold/Tin		
	S4=10u" Gold/Tin		
	S5=15u" Gold/Tin		
	S6=30u" Gold/Tin		

TABLE1:

No. OF PIN	A	B	C
006=2x3PIN	10.22	5.08	14.42
008=2x4PIN	12.76	7.62	16.96
010=2x5PIN	15.30	10.16	19.50
012=2x6PIN	17.84	12.70	22.04
016=2x8PIN	22.92	17.78	27.12
032=2x16PIN	43.24	38.10	47.44
050=2x25PIN	66.10	60.96	70.30
.....			
100=2x50PIN	129.60	124.60	133.80

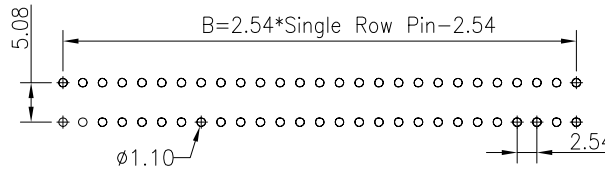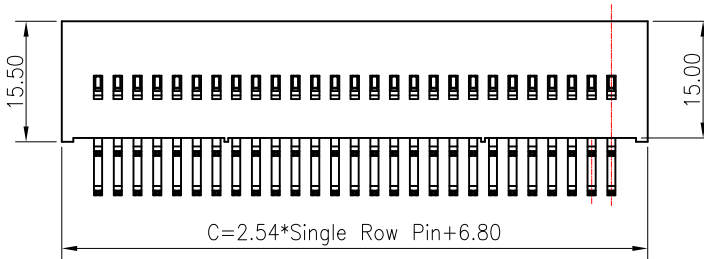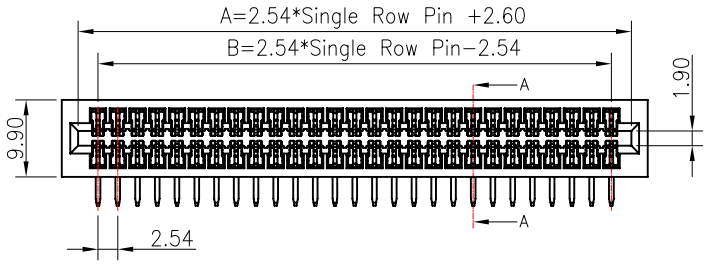

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLFRANCF+0.05)

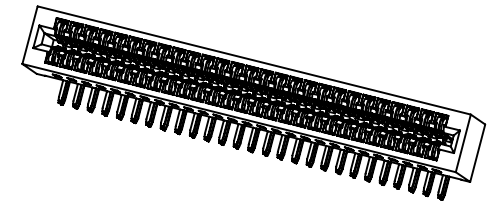

SECTION:A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW		WLY		SOLEPIN 东莞市硕品电子有限公司			
					DIM.	TOL	UNIT	mm	SCALE	1:1	PROJ.	SIZE	A4	PART NO.
A1	2021.04.08	更正铜材型号		WLY	X.X	±0.40	DESIGN	Jensen	2021.04.08	Professional connector manufacturer DONGGUAN SOLEPIN ELECTRONICS CO., LTD.				
AO		NEW			X.XX	±0.25	CHECK	Jack	2021.04.08	SHEET	1/1	TITLE:	2.54x5.08mm 金手指 DIP 90°	
					X.XXX	±0.15	APPROVE	Andy	2021.04.08	PROJ.	1/1	DRAW NO.	SP-371	
					Angle	±3°								